



www.my-fis.com

DLD-II Installation in Vehicle using the Y-Harness

1. How to install the Y-Harness cable

1.1 Please unplug the white plug.



1.2 Stick the white plug from the DTCO in the plug from the Y-Harness cable.




1.3 Stick the white plug from Y-Harness cable in the DTCO where the original white plug was into.



1.4 Unplug the red plug from the DTCO.



1.5 Stick the red plug from the DTCO in the red plug from the Y-Harness cable.

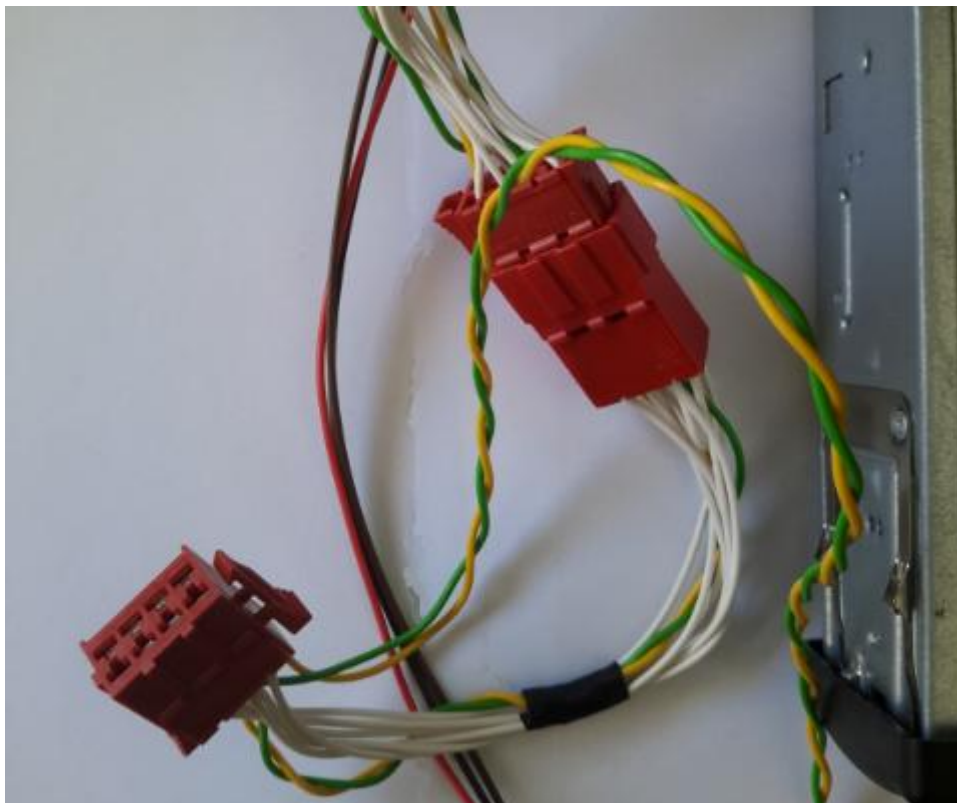

1.6 Stick the red plug from Y-Harness cable in the DTCO where the original red plug was into.



1.7 Now stick in the DLD and you are finished.

